

INNOFIT PLUS DOWNLIGHT INSTALLATION GUIDE – WARNING

WARNING – Read all product labels and instructions before installing fixture.

WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. Installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local code.

WARNING – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.

WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

WARNING – Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING – The recessed luminaire is intended for mounting only in a covered ceiling where only the led side of the luminaire will be exposed to wet locations.

WARNING – INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.

RETROFIT INSTALLATION

1. Make sure the POWER IS TURNED OFF at the source to the recessed housing in which you are installing the product.
2. If existing lamp and trim are present, remove from ceiling or move it out of the way as it will not be needed during installation. Measure the ceiling opening to make sure the edge of the luminaire will cover the entire hole and still sit firmly in the ceiling before proceeding (fig. 1).
3. If a goof ring is needed, insert the goof ring around the reflector (fig. 2).
4. Attach the carabiner safety clip to the existing fixture housing (fig. 3).
5. Remove junction box faceplate. Disconnect all wires to the ballast and remove ballast from J-Box. Remove appropriate round knock out and attach the fixture conduit whip into knock out. Connect incoming power (White to White, Black to Black, Green to Green/Ground). For 0-10V dimming circuits, connect Gray or Pink to Gray or Pink and Purple to Purple. Reattach J-Box faceplate (fig. 4).
6. Adjust the fixture power to desired lumen output by sliding the blue select switch. Adjust the fixture color temperature to desired CCT by sliding the orange select switch. Make sure the switch is never in between positions (fig. 5).
7. Squeeze the two spring clips so they are in an upright position and insert lamp into housing (fig. 6).
8. Once fixture is inside the housing, release the spring clips and continue pushing fixture until securely fixed and flush with ceiling (fig. 7).
9. Restore power at the source and the installation is complete.

fig. 1




fig. 2




fig. 3




fig. 4




fig. 5




fig. 6





fig. 7



NEW CONSTRUCTION INSTALLATION

1. Make sure the POWER IS TURNED OFF at the source to the location in which you are installing the product.
2. If using a new Construction Plate, install it in the ceiling following its own installation instruction (fig. 1).
3. If a new hole is needed, use a hole cutter, and set the diameter (see detailed dimensions from the below table) (fig. 2).
4. Attach the carabiner safety clip to a secure place inside the ceiling (fig. 3).
5. Adjust the fixture power to desired lumen output by sliding the blue select switch. Adjust the fixture color temperature to desired CCT by sliding the orange select switch. Make sure the switch is never in between positions (fig. 4).
6. Insert lamp conduit into a preinstalled J-box (not provided) and wire to the power source (black to hot, white to neutral, green to ground). For 0-10V dimming circuits, connect gray or pink to gray or pink and purple to purple. Close the J-box securely (fig. 5).
7. Squeeze the two spring clips so they are in an upright position and insert lamp into housing (fig. 5).
8. Once lamp is inside the housing, release the spring clips and continue pushing fixture until securely fixed and flush with ceiling (fig. 6).
9. Restore power at the source and the installation is complete.

fig. 1




fig. 2

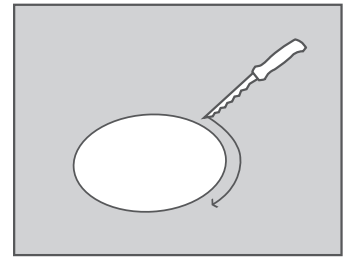


fig. 3




fig. 4

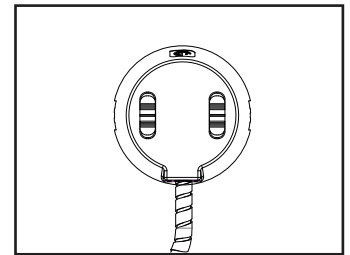


fig. 5






fig. 6

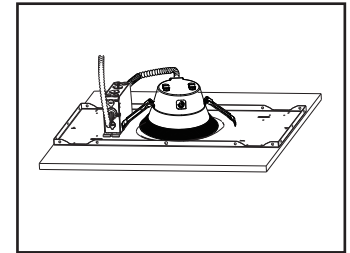

INNOFIT PLUS DOWNLIGHT HOUSING COMPATIBILITY

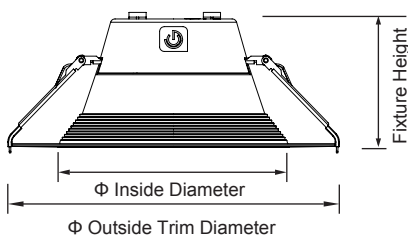

	A	B	C		
Model	Inside Diameter	Outside Trim Diameter	Fixture Height	Minimum Cutout	Maximum Cutout
INFTP4/8CCT3S/DIM010UNV	4-1/16"	5-7/8"	3-7/16"	4-1/8"	5-1/8"
INFTP6/8CCT3S/DIM010UNV	5-15/16"	8-5/16"	3-7/16"	6-1/16"	7-1/2"
INFTP6/8CCT3S/DIM120V	5-15/16"	8-5/16"	3-7/16"	6-1/16"	7-1/2"
INFTP8/8CCT3S/DIM010UNV	7-1/2"	10-1/4"	3-7/16"	7-9/16"	9-7/16"
INFTP8/8CCT3S/DIM120V	7-1/2"	10-1/4"	3-7/16"	7-9/16"	9-7/16"
INFTP9.5/8CCT3S/DIM010UNV	8-7/16"	11-1/4"	3-7/16"	8-9/16"	10-7/16"

INFTP4 is compatible with most standard housing with aperture ranging from 4-1/8" to 5-1/8"

INFTP6 is compatible with most standard housing with aperture ranging from 6-1/16" to 7-1/2"

INFTP8 is compatible with most standard housing with aperture ranging from 7-9/16" to 9-7/16"

INFTP9.5 is compatible with most standard housing with aperture ranging from 8-9/16" to 10-7/16"