

VAPOR TIGHT HIGH BAY RETROFIT KIT

HIGH BAY



FEATURES

- Easy Upgrade to LED
- Installs In Less Than 5 Mins.
- Reduce Power Consumption By 50%
- Durable Aluminum 1 Piece Kit
- Universal Voltage Driver
- Clear Acrylic, Frosted Acrylic, Or Polycarbonate Lens Options
- 5 Year Warranty
- ETL Listed
- DesignLights Consortium® Premium Qualified Luminaire



SUITABLE APPLICATIONS

- ILP Blizzard Series
- Lithonia FHE Series
- Cooper VT4 Series
- Columbia XEW4 Series
- Philips DayBrite CFI Series

REPLACES

3T5HO/4T8, 4T5HO/6T8, 6T5HO

LED SYSTEMS INFO	80W	80W FRAL	120W	120W FRAL	160W	160W FRAL
Calculated L ₇₀ (TM-21)	>100K	>100K	>100K	>100K	>100K	>100K
Delivered Lumens	12,884 lm	12,652 lm	17,410 lm	17,028 lm	24,426 lm	23,930 lm
Total Input Watts	84 W	84 W	116 W	117 W	160 W	160 W
Luminaire Efficacy Rating (LER)	154 lm/W	151 lm/W	150 lm/W	146 lm/W	152 lm/W	150 lm/W
Correlated Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K	5000K
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Ambient Temperature Range	-40°F-130°F	-40°F-130°F	-40°F-130°F	-40°F-130°F	-40°F-125°F	-40°F-125°F
Universal Driver	120-277 V	120-277 V	120-277 V	120-277 V	120-277 V	120-277 V

LED System data above based on BLR-80WLED-UNIV-50, BLR-80WLED-UNIV-50-FRAL, BLR-120WLED-UNIV-50, BLR-120WLED-UNIV-50-FRAL, BLR-160WLED-UNIV-50, & BLR-160WLED-UNIV-50-FRAL
LED Lumen maintenance estimates based on TM-21 projections for the light source at 25°C ambient.

ORDERING GUIDE:

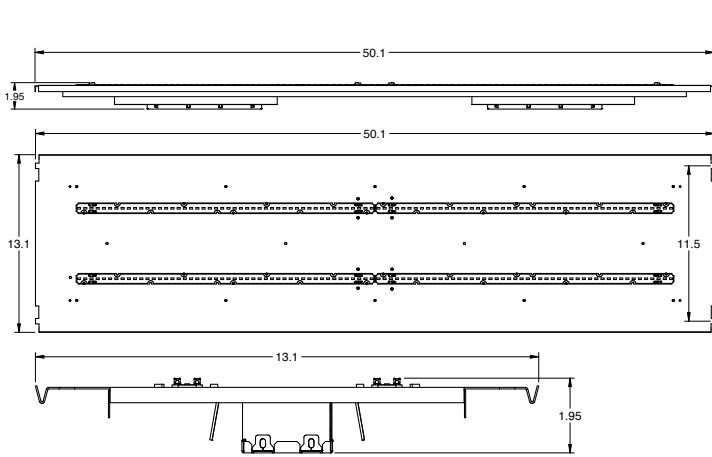
Series	Watts	Driver	Color	Options
BLR High Bay Retrofit	80WLED	UNIV 120-277V Driver	50	CAL Clear Acrylic Lens
	120WLED		40	FRAL Frosted Acrylic Lens
	160WLED		35	PCL* Clear Polycarbonate Lens .125"
			30	WLOS Wet Location Sensor
				USBD User Select Bi-level Dim w/ Occ. Sensor
				BDxx Preset Bi-level Dim Sensor (xx=% eg. 20,30)
				BDxxPC Preset Bi-level Dim Sensor w/ Photocell
				F1/ILBCP05 5W LED Factory Installed Battery Backup
				F1/ILBCP07 7W LED Factory Installed Battery Backup
				F1/ILBCP10 10W LED Factory Installed Battery Backup
				F1/ILBCP12 12W LED Factory Installed Battery Backup
				LEDBBCT -4°F Cold Temperature Battery Backup

* Does Not Qualify for DLC

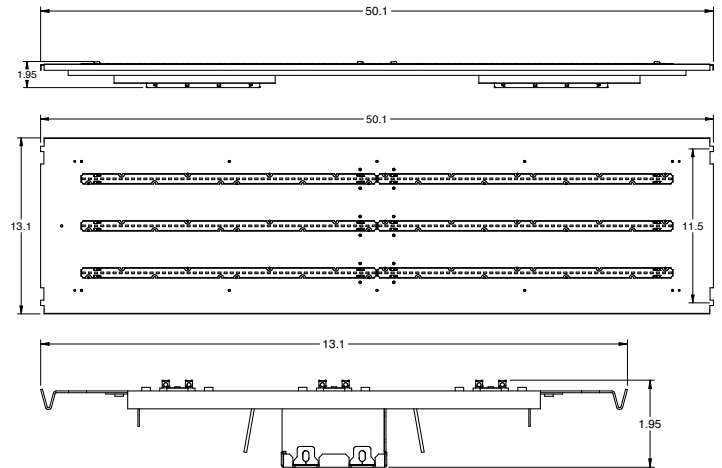
VAPOR TIGHT HIGH BAY RETROFIT KIT

HIGH BAY

LINE DRAWINGS

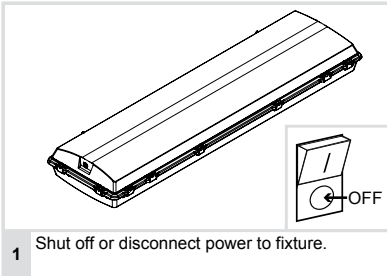


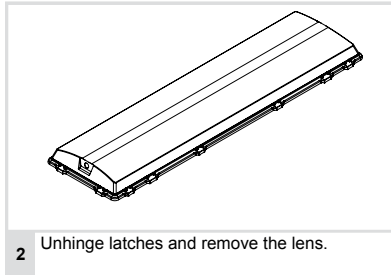
80W & 120W

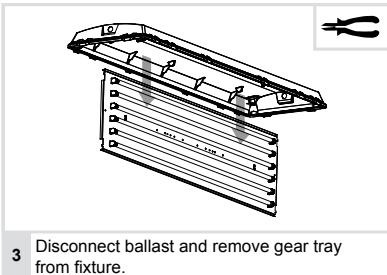


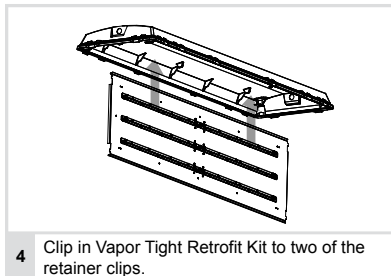
160W

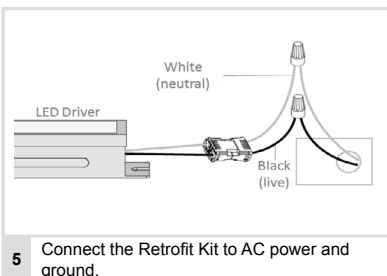
INSTALLATION INSTRUCTIONS

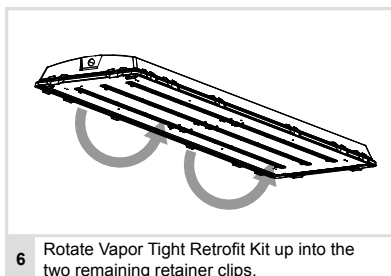
- 

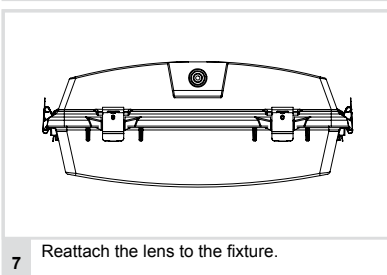
1 Shut off or disconnect power to fixture.
- 

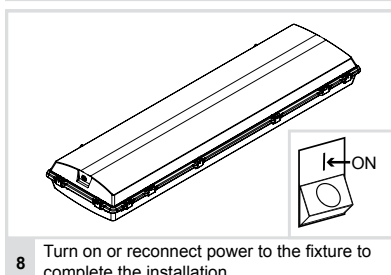
2 Unhinge latches and remove the lens.
- 

3 Disconnect ballast and remove gear tray from fixture.
- 

4 Clip in Vapor Tight Retrofit Kit to two of the retainer clips.
- 

5 Connect the Retrofit Kit to AC power and ground.
- 

6 Rotate Vapor Tight Retrofit Kit up into the two remaining retainer clips.
- 

7 Reattach the lens to the fixture.
- 

8 Turn on or reconnect power to the fixture to complete the installation.

VAPOR TIGHT HIGH BAY RETROFIT KIT

HIGH BAY

PHOTOMETRIC REPORTS

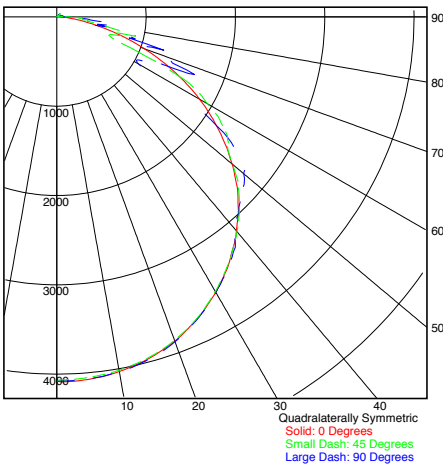
Photometric values based upon tests performed in compliance with LM-79. IES files can be downloaded at www.ilp-inc.com

BLR-80WLED-UNIV-50

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	98.8 %
EFFICIENCY (Uplight):	1.2 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.30
SPACING CRITERION (90-Deg.):	1.30
LUMENS:	12621.06
INPUT WATTS:	83.6

PLANE AND CONE DIAGRAM

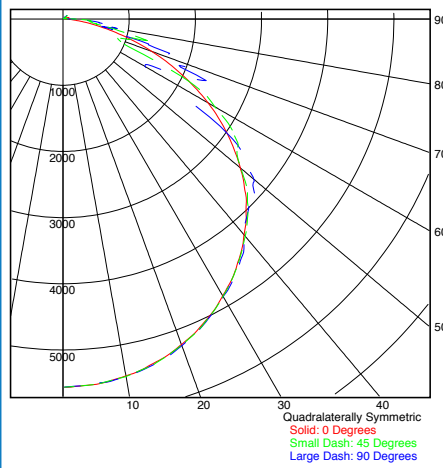


BLR-120WLED-UNIV-50

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	98.8 %
EFFICIENCY (Uplight):	1.2 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.29
SPACING CRITERION (90-Deg.):	1.30
LUMENS:	16504.36
INPUT WATTS:	116.5

PLANE AND CONE DIAGRAM

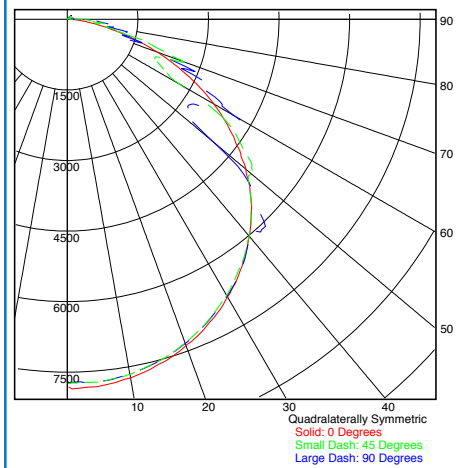


BLR-160WLED-UNIV-50

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	98.8 %
EFFICIENCY (Uplight):	1.2 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.30
SPACING CRITERION (90-Deg.):	1.30
LUMENS:	23107.21
INPUT WATTS:	160.29

PLANE AND CONE DIAGRAM

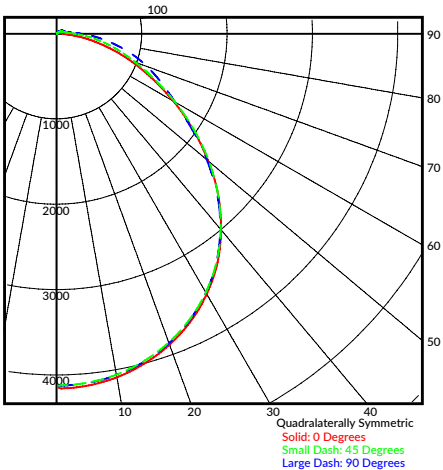


BLR-80WLED-UNIV-50-FRAL

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	96.9 %
EFFICIENCY (Uplight):	3.1 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.26
SPACING CRITERION (90-Deg.):	1.26
LUMENS:	11974.19
INPUT WATTS:	83.55

PLANE AND CONE DIAGRAM

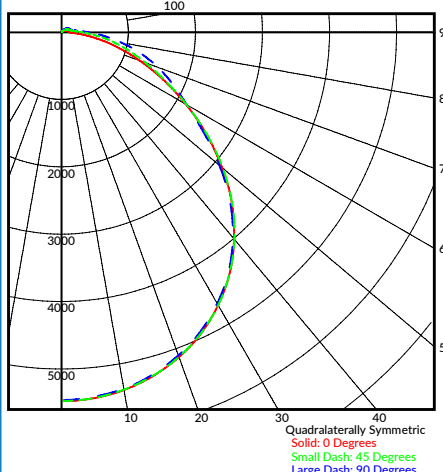


BLR-120WLED-UNIV-50-FRAL

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	96.5 %
EFFICIENCY (Uplight):	3.5 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.27
SPACING CRITERION (90-Deg.):	1.26
LUMENS:	16112.42
INPUT WATTS:	116.57

PLANE AND CONE DIAGRAM



BLR-160WLED-UNIV-50-FRAL

SUMMARY DATA

HEMISPHERES TESTED:	BOTH
EFFICIENCY (Downlight):	96.5 %
EFFICIENCY (Uplight):	3.5 %
CIE CLASSIFICATION:	DIRECT
SPACING CRITERION (0-Deg.):	1.26
SPACING CRITERION (90-Deg.):	1.26
LUMENS:	22646.54
INPUT WATTS:	160.13

PLANE AND CONE DIAGRAM

