

Project Name:	Type:
Part Number:	Date:

VERSA FILAMENT SERIES

FEATURES

- Suitable to replace 25W, 40W, 60W and 75W incandescent
- High CRI and R values (R9 50, R13 95) deliver richer reds and natural skin tones
- Full glass construction
- Provides an excellent option for energy savings in any fixtures
- Available in 2700K, 3000K, 4000K and 5000K color temperatures
- 320° omnidirectional beam angle
- Smooth dimming with most forward and reverse phase controls *
- Suitable for use in totally enclosed fixtures
- Suitable for use in wet locations
- Wider fixture operating temperature: -13°F to 113°F (-25°C to 45°C) **
- Rated Lifetime (L70): 25,000hrs for Candle series, 15,000hrs for A19 series
- 3 year limited warranty ***



DIGITAL NAVIGATION

Explore the spec sheet through the links below

[DIMENSION & WEIGHT](#) [LOGISTIC INFORMATION](#)

SPECIFICATIONS


Product	Model	Equiv.	Wattage (W)	CCT	Lumens	Efficacy (LPW)	Input Voltage	Beam Angle	CRI	Dim.*	Finish	UL Location	Fixture Rating	Power Factor	JA8	T20	DOE
36748	9FA19DIM/930	60W	9	3000K	820	91	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	✓
36749	9FA19DIM/940	60W	9	4000K	850	94	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	✓
36752	10FA19DIM/930	75W	10	3000K	1,150	115	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.9	✓	✓	✓
37056	2FB11DIM/927	25W	2	2700K	200	100	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	N.A.
37057	2FB11DIM/927/E26	25W	2	2700K	200	100	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	N.A.
37058	3.3FB11DIM/927/RC	40W	3.3	2700K	300	91	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	N.A.
37059	3.3FB11DIM/927/FR/RC	40W	3.3	2700K	300	91	120V	320°	92	Yes	Frosted	Wet	Enclosed	≥0.7	N.A.	✓	N.A.
37061	3.3FB11DIM/820/A	40W	3.3	2000K	240	79	120V	320°	82	Yes	Amber	Wet	Enclosed	≥0.7	N.A.	N.A.	N.A.
37062	3.3FBA11DIM/820/FT/A/RC	40W	3.3	2000K	240	79	120V	320°	82	Yes	Amber	Wet	Enclosed	≥0.7	N.A.	N.A.	N.A.
37063	5.5FB11DIM/927/RC	60W	5.5	2700K	500	91	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	✓
37065	5.5FB11DIM/927/E26/RC	60W	5.5	2700K	500	91	120V	320°	92	Yes	Clear	Wet	Enclosed	≥0.7	N.A.	✓	✓

FOOTNOTES:
 *This lamp might not be compatible with all dimmers. Please visit www.greencreative.com for compatibility information.
 ** Fixture operating temperature for A19 series: -13°F to 113°F (-25°C to 45°C). For Candle series, fixture operating temperature -13°F to 95°F (-25°C to 35°C) and lamp ambient temperature: -13°F to 113°F (-25°C to 45°C).
 *** Please visit www.greencreative.com for Limited Warranty terms.



VERSA FILAMENT SERIES

DIMENSION & WEIGHT

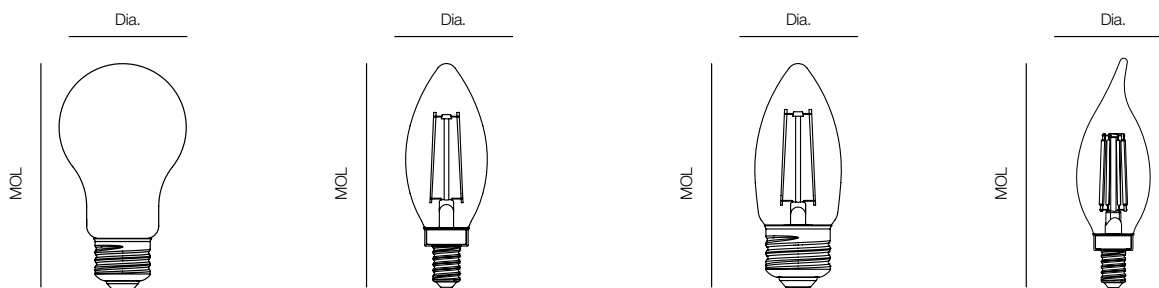

Model	Base	MOL	Dia.	Weight
9FA19DIM/xxx	E26	4-3/16"	2-3/8"	0.07 lb
10FA19DIM/xxx	E26	4-3/16"	2-3/8"	0.07 lb
2FB11DIM/xxx	E12	3-13/16"	1-3/8"	0.03 lb
3.3FB11DIM/xxx/RC	E12	3-13/16"	1-3/8"	0.03 lb
3.3FB11DIM/xxx/FR/RC	E12	3-13/16"	1-3/8"	0.03 lb
3.3FB11DIM/xxx/A	E12	3-13/16"	1-3/8"	0.03 lb
5.5FB11DIM/9xx/RC	E12	3-13/16"	1-3/8"	0.03lb
2FB11DIM/9xx/E26	E26	3-9/16"	1-3/8"	0.04 lb
5.5FB11DIM/9xx/E26/RC	E26	3-9/16"	1-3/8"	0.04 lb
3.3FBA11DIM/xxx/FT/A/RC	E12	4-3/8"	1-3/8"	0.03lb

LOGISTIC INFORMATION

Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
9FA19DIM/xxx	6PCS	8-1/4"x5-11/16"x5-1/8"	0.93lb	24PCS	17-1/8"x12"x6-5/16"	4.63lb
10FA19DIM/xxx	6PCS	8-1/4"x5-11/16"x5-1/8"	0.93lb	24PCS	17-1/8"x12"x6-5/16"	4.63lb
2FB11DIM/xxx	6PCS	5-1/16"x3-3/8"x4-3/4"	0.39lb	24PCS	10-1/2"x7-5/16"x5-5/16"	1.94lb
2FB11DIM/xxx/E26	6PCS	5-1/16"x3-3/8"x4-3/4"	0.43lb	24PCS	10-1/2"x7-5/16"x5-5/16"	2.10lb
3.3FB11DIM/xxx/RC	6PCS	5-1/16"x3-3/8"x4-3/4"	0.39lb	24PCS	10-1/2"x7-5/16"x5-5/16"	1.94lb
3.3FB11DIM/XXX/FR/RC	6PCS	5-1/16"x3-3/8"x4-3/4"	0.39lb	24PCS	10-1/2"x7-5/16"x5-5/16"	1.94lb
3.3FB11DIM/XX/A	6PCS	5-1/16"x3-3/8"x4-3/4"	0.39lb	24PCS	10-1/2"x7-5/16"x5-5/16"	1.94lb
5.5FB11DIM/xx/E26/RC	6PCS	5-1/16"x3-3/8"x4-3/4"	0.47lb	24PCS	10-1/2"x7-5/16"x5-5/16"	2.24lb
3.3FBA11DIM/820/FI/A/RC	6PCS	5-1/16"x3-3/8"x5-1/8"	0.39lb	24PCS	10-1/2"x7-5/16"x5-15/16"	1.94lb
5.5FB11DIM/927/RC	6PCS	5-1/16"x3-3/8"x4-3/4"	0.43lb	24PCS	10-1/2"x7-5/16"x5-5/16"	2.07lb

Where xxx means 824-965 which indicates CRI and color temperature