

Project Name:	Type:
Part Number:	Date:

MULTIFIT FLAT ROUND

SPECIFICATION FEATURES

- Mechanical** - Compact fixture body made from die cast aluminum for maximizing passive cooling ensuring long life lasting LED, non yellowing frosted polycarbonate lens for optimal light diffusion. Proprietary IC-rated potted driver for optimal heat protection, with hot-dip galvanized steel box and easy tool-less opening attached clipping lid. Rugged spring clips allow for both easy direct installation from 3/8" to 1" ceiling thickness and field accessibility below the ceiling for service or replacement. Additional mounting plates also available if required. Plenum rated cable and connector to connect from downlight to remote driver box.
- Electrical** - The driver features DualDim technology, for maximum adaptability in any spaces whether it's commercial, residential or mixed. Rated for 120V to 277V, 50/60 Hz the driver is both 0-10V dimmable to 5% with low-end cut off and Forward and Reverse phase dimmable at 120V down to 10%. Please consult dimmer compatibility for additional information. Drivers also feature easy accessible outside switch for selecting the right color temperature. Coming with four 7/8" knockout, and suitable for pulling wires to accommodate up to (6) 12 gauge 90°C insulated conductors, making the MULTIFIT downlights fast and easy to wire in daisy-chain applications and contractor friendly. Sound rating <22db.
- Optical** - Featuring SelectKelvin technology with field selectable CCTs 2700/3000/3500/4000/5000K. LED binning within 4 SDCM maximum. Offered in minimum 90 CRI. 110° optical beam angle. Edge-lite technology for minimizing glare.
- Thermal** - Die cast heat sink maximizes passive thermal management and achieves a L70 calculated lifetime of 100,000 hours. Ambient temperature rated from -5°F to 113°F (-15°C to 45°C).
- Compliance and Warranty** - ETL Listed for wet location. Certified air-tight per ASTM 283-04. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions. Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements. Certified IC for direct contact with insulation. 5 Year Warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



DIGITAL NAVIGATION Explore the spec sheet through the links below

- | | |
|--|---|
| ORDERING GUIDE | TECHNICAL INFORMATION |
| NOMINAL PERFORMANCE | LINE DRAWINGS |
| ACCESSORY ORDERING INFORMATION | PHOTOMETRY |
| LOGISTIC INFORMATION | CERTIFICATION INFORMATION |

BENEFITS

- MULTIFIT provides the easiest retrofitting or new installation dimming compatibility with DualDim technology
- SelectKelvin technology to choose from five color temperatures ranging from 2700K to 5000K
- Install virtually anywhere with Wet Location, IC and Air-tight ratings
- Quick and easy installation with spring action clip even in the shallower plenums
- External driver with quick connector for easy wiring and daisy chain application

SUITABLE APPLICATIONS

- Retail
- Hospitality
- Residential
- Education
- Healthcare



MULTIFIT FLAT ROUND

ORDERING GUIDE

PART #

Example: MFR6/9CCT5S/DUALDIM/EXT

Series	Size	CRI	CCT	Driver	Driver Style
MFR MULTIFIT Round Flat	4 4" 680lm	9 CRI 90+	CCT5S Selectable CCT 2700 / 3000 / 3500 / 4000 / 5000K	DUALDIM 0-10V dimming at 120-277V and Forward/Reverse phase dimming at 120V only	EXT External Driver box with quick connector
	6 6" 830lm				
	6HO 6" 1150lm				
	8 8" 1150lm				
	8HO 8" 1980lm				

FOOTNOTES: Factory setting at 3500K CCT

TECHNICAL INFORMATION

Type	Dimming	Input Voltage	Input Frequency	Input Current	Max. Input Power	THD Power	Power Factor	Flicker Index	Sound Rating
MFR4	0-10V and ELV/TRIAC	120-277V	50-60Hz	0.06 / 0.04A	8W	<20%	>0.9	<30%	<22db
MFR6				0.08 / 0.04A	10W				
MFR6HO				0.11 / 0.06A	14W				
MFR8				0.14 / 0.07A	18W				
MFR8HO				0.20 / 0.09A	24W				

NOMINAL PERFORMANCE







CCT	2700K			3000K			3500K			4000K			5000K		
	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy	Power	Lumens	Efficacy
MFR4	8.4W	620lm	74LPW	8.5W	643lm	76LPW	8.4W	663lm	79LPW	8.4W	667lm	80LPW	8.3W	656lm	79LPW
MFR6	9.3W	733lm	79LPW	8.5W	746lm	79LPW	9.4W	766lm	82LPW	9.4W	773lm	83LPW	9.25W	771lm	83LPW
MFR6HO	14.5W	1017lm	70LPW	14.7W	1050lm	71LPW	14.5W	1092lm	75LPW	14.5W	1107lm	76LPW	14.3W	1092lm	76LPW
MFR8	17.2W	1394lm	81LPW	17.4W	1441lm	83LPW	17.1W	1487lm	87LPW	17.1W	1506lm	88LPW	17.0W	1492lm	88LPW
MFR8HO	23.8W	1815lm	76LPW	24.1W	1884lm	78LPW	23.8W	1971lm	83LPW	23.7W	1998lm	84LPW	23.7W	1942lm	82LPW




MULTIFIT FLAT ROUND

LINE DRAWINGS


MFR

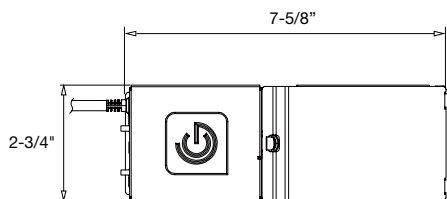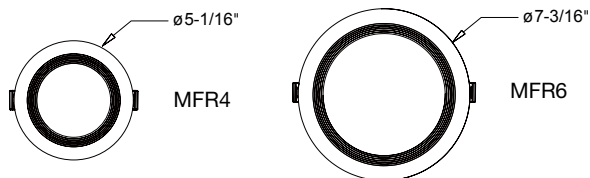


MFR4



MFR6



MFR8



Ceiling Cutout		
Type	Minimum	Maximum
MFR4	4-1/4"	4-5/8"
MFR6/6HO	6-1/8"	6-7/8"
MFR8/8HO	7-15/16"	8-9/16"






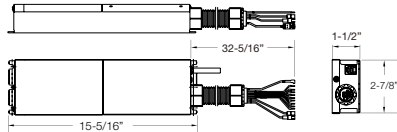


MULTIFIT FLAT ROUND

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
35121	NCFJB4	Round New Construction Frame w/ Jbox 4"		
35122	NCFJB6	Round New Construction Frame w/ Jbox 6"		
35123	NCFJB8	Round New Construction Frame w/ Jbox 8"		
98502	NOPLATE468	4" & 6" MULTIFIT EXT Series New Construction Plate for Stud/Joist Mounting		
98501	NOPLATE/T4689	New Construction or Remodel Plate for T-Grid Ceilings		
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"		
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"		
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"		
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)		

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.




MULTIFIT FLAT ROUND

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
38096	24EMINVERTER	California Title 20 Compliant 24W Emergency LED Inverter (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options.100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		
37045	MFCON10	MULTIFIT Extension Cable Connector 10FT For all MULTIFIT Downlights Can connect max 2 cable together for a max length of 20FT		

PHOTOMETRY

MFR4/9CCT5S/DUALDIM/EXT (at 3500K)




Lumens: 691 lm
CBCP: 247 cd
Power: 8.0 W
Efficacy: 86 lm/W
CRI: 92
Spacing Criteria: 1.2
Beam Angle: 113°

Candlepower Distribution		Initial Footcandles		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)
10	243	8	6	24
20	230	10	4	30
30	209	12	3	36
40	182	15	2	45
50	149	20	1	61
60	109			
70	63			
80	18			
90	0			

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	192	28
0-40	314	46
0-60	558	81
0-90	691	100

MFR6/9CCT5S/DUALDIM/EXT (at 3500K)



Lumens: 860 lm
CBCP: 301 cd
Power: 10.0 W
Efficacy: 89 lm/W
CRI: 92
Spacing Criteria: 1.3
Beam Angle: 114°

Candlepower Distribution		Initial Footcandles		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)
10	295	8	7	24
20	279	10	4	31
30	254	12	3	37
40	220	15	2	46
50	180	20	1	61
60	135			
70	83			
80	30			
90	0			


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	233	27
0-40	382	44
0-60	679	79
0-90	860	100



MULTIFIT FLAT ROUND

PHOTOMETRY

MFR6HO/9CCT5S/DUALDIM/EXT (at 3500K)




Candlepower Distribution	
Angle (°)	Average (cd)
10	438
20	412
30	373
40	321
50	261
60	188
70	110
80	31
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	10	23
10	7	29
12	5	35
15	3	43
20	2	58

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	345	28
0-40	563	46
0-60	990	81
0-90	1,218	100

Lumens: 1,219 lm
CBCP: 446 cd
Power: 15.0 W
Efficacy: 85 lm/W
CRI: 92
Spacing Criteria: 1.2
Beam Angle: 111°

MFR8/9CCT5S/DUALDIM/EXT (at 3500K)




Candlepower Distribution	
Angle (°)	Average (cd)
10	608
20	577
30	526
40	458
50	376
60	284
70	176
80	72
90	2

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	14	25
10	11	28
12	9	31
15	6	37
20	4	47

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	482	27
0-40	791	44
0-60	1,410	78
0-90	1,800	100

Lumens: 1,800 lm
CBCP: 621 cd
Power: 18.0 W
Efficacy: 103 lm/W
CRI: 92
Spacing Criteria: 1.3
Beam Angle: 115°

MFR8HO/9CCT5S/DUALDIM/EXT (at 3500K)



Candlepower Distribution	
Angle (°)	Average (cd)
10	714
20	672
30	605
40	520
50	419
60	302
70	176
80	57
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	17	23
10	11	28
12	7	34
15	5	42
20	3	56

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	561	28
0-40	915	46
0-60	1,600	81
0-90	1,980	100

Lumens: 1,982 lm
CBCP: 729 cd
Power: 25 W
Efficacy: 82 lm/W
CRI: 92
Spacing Criteria: 1.2
Beam Angle: 109°



MULTIFIT FLAT ROUND

LOGISTIC INFORMATION

Product	Model	Shipping Carton		
		Case Qty	Case Dimensions (LxWxH)	Case Weight
36998	MFR4/9CCT5S/DUALDIM/EXT	12PCS	19-19-5/8" x 11-5/8" x 11-5/8"	20.56 lb
36999	MFR6/9CCT5S/DUALDIM/EXT	12PCS	20-5/8" x 19-5/16" x 8-5/8"	26.06 lb
37000	MFR6HO/9CCT5S/DUALDIM/EXT	12PCS	20-1/2" x 19-7/16" x 8-5/8"	26.13 lb
37001	MFR8/9CCT5S/DUALDIM/EXT	12PCS	21-1/8" x 20-15/16" x 10-3/8"	34.43 lb
37002	MFR8HO/9CCT5S/DUALDIM/EX	12PCS	19-5/8" x 11-5/8" x 11-11/16"	20.56 lb

CERTIFICATION INFORMATION

Product	Model	ES ID#
36998	MFR4/9CCT5S/DUALDIM/EXT	2403392
36999	MFR6/9CCT5S/DUALDIM/EXT	2403393
37000	MFR6HO/9CCT5S/DUALDIM/EXT	2403387
37001	MFR8/9CCT5S/DUALDIM/EXT	2403579
37002	MFR8HO/9CCT5S/DUALDIM/EXT	2403390